





# Sentinel<sup>®</sup> Connector Systems Inc.

1953 Stanton Street

York, Pa. 17404

PART NO.: 114S040800C34

- \* FOUR CONDUCTOR RJ45 MODULAR PLUG
- \* FOR 10 BASE T APPLICATION
- \* FOR CONDUCTORS WITH AN O.D. RANGE OF .055/.060
- \* SHIELDED VERSION MODULAR PLUG
- \* ADDED EXTERNAL STRAIN RELIEF FEATURE
- \* FOR SOLID OR STRANDED WIRE APPLICATIONS
- \* USES .012 CONTACT

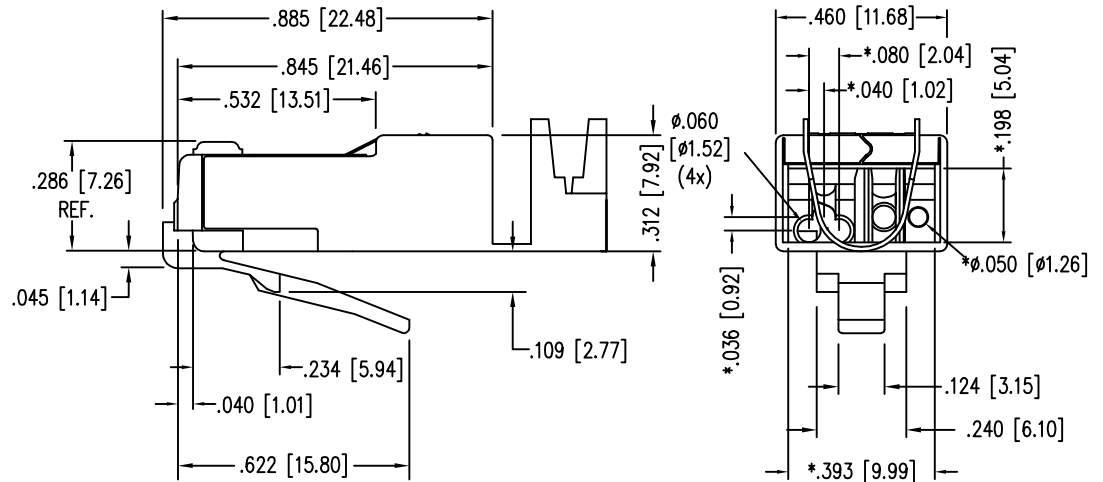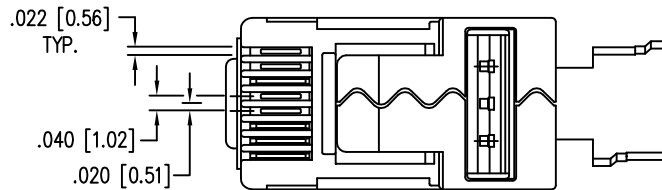

"PATENT APPLIED FOR"

PERFORMANCE:	MEETS OR EXCEEDS CATEGORY 5e TIA/EIA 568-B.2
	SPECIFICATIONS :
CONTACT MATERIAL:	PHOSPHOR BRONZE - .012 THK
CONTACT PLATING:	50 MICRO-INCH : OTHER PLATING OPTIONS AVAILABLE SELECTIVE 24 CARAT HARD GOLD PLATE IN CONTACT AREA OVER 100 MICRO-INCH MINIMUM NICKEL PLATE PER CURRENT SELECTIVE GOLD PLATING REQUIREMENTS.
PLUG MATERIAL:	POLYCARBONATE
SHIELD MATERIAL:	.012 THK CDA-260 1/4 HARD BRASS
SHIELD PLATING:	100% TIN, 100-150 MICRO-INCH TIN PLATED
PLUG TOLERANCES AND DIMENSIONS:	* COMPLIES WITH ANSI/TIA-1096-A REQUIREMENTS
FLAME AUTO EXTINGUISH	94-V0 - File# E188111
OPERATION TEMPERATURE:	-40°C TO +85°C
INSERTION/EXTRACTION LIFE:	1000 CYCLES
CONTACT RESISTANCE:	10 MILLOHMS MAX.
CURRENT/VOLTAGE:	30 VAC/42 VDC AT 1.5 AMPS
(RoHS COMPLIANT)	

\* FORMER COMPLIANCE, FCC PART 68.500

